

US006996886B1

# (12) United States Patent Rinner

### Rinner

## (54) METHOD OF MAKING A TORQUE TOOL HANDLE

(75) Inventor: James A. Rinner, Racine, WI (US)

(73) Assignee: Pilling Weck Incorporated, Horsham,

PA (US)

(\*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 10/923,766

(22) Filed: Aug. 23, 2004

#### Related U.S. Application Data

- (62) Division of application No. 10/215,405, filed on Aug.9, 2002, now Pat. No. 6,807,883.
- (51) **Int. Cl. B25B** 23/16 (2006.01)

See application file for complete search history.

### (10) Patent No.: US 6,996,886 B1

(45) **Date of Patent:** Feb. 14, 2006

#### (56) References Cited

#### U.S. PATENT DOCUMENTS

2,774,133 A 2,836,091 A 3,672,419 A 4,692,073 A	* 5/1958 6/1972	Stiz	
6,055,889 A 6,199,872 B1 6,352,011 B1 6,564,680 B1			81/438

#### FOREIGN PATENT DOCUMENTS


JP 07068477 A \* 3/1995

Primary Examiner—David P. Bryant Assistant Examiner—Jermie E. Cozart (74) Attorney, Agent, or Firm—Arthur J. Hansmann

#### (57) ABSTRACT

A torque tool handle for releasably holding a driven shank, such as a screwdriver bit. The handle is elongated and has an opening with a sleeve therein carrying a detent and an actuator which is slidable on the sleeve for alternate locking and release of the detent relative to the shank disposed in the sleeve. There can be two handle openings at right angles to each other and with each having a sleeve and an actuator and a detent, so the handle is both an axial and a T-handle driver.

#### 4 Claims, 3 Drawing Sheets

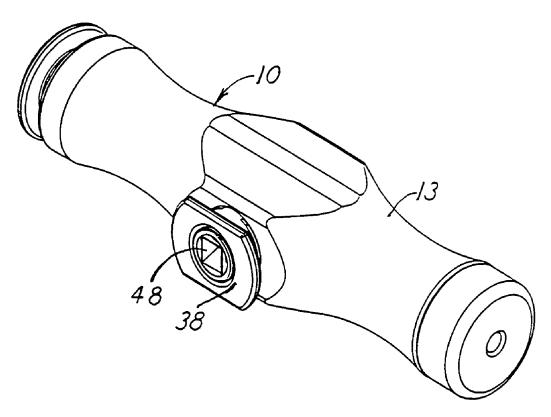

<sup>\*</sup> cited by examiner